


# iMist3 Setup Guide – Part 1

\* iMist3 is designed to be installed directly on a MistAway System and connect to a cellular tower. It does not connect to a home's internet network.

## Connect iMist3 Module to Mobile Network

- Unplug misting unit and remove controller.
- Daisy Chain iMist3 module, white receiver, and controller. **Please note how white connectors are plugged in as their orientation is extremely important.**
- Thread antenna onto coax connector on module.
- Power on misting unit.
- Observe controller boot up screen. **Confirm “IM1 ON” appears on controller.**
- Observe flashing green LED on module
  - Fast flashing = Searching for suitable mobile tower
  - Slow flashing = Latched to mobile network ✓
- **This process can take 1-5 minutes**

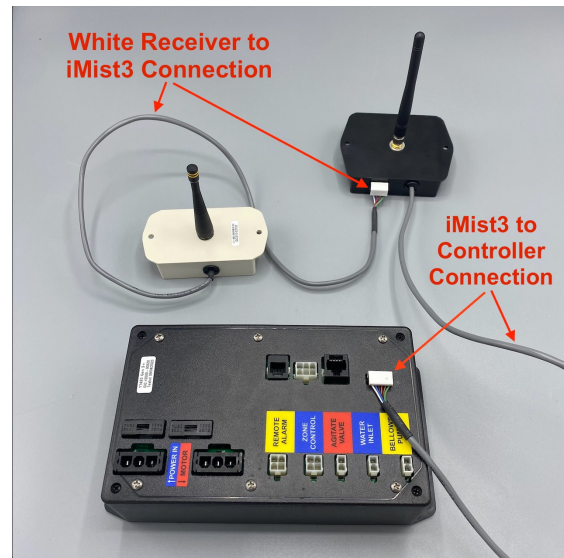

## 1. Add Customer

- Login to the iMistAway app .
- Tap Menu (≡) icon in upper left, then select “Customers”.
- Tap “+ Add” in upper right to add a new customer.
- Input Customer Information and then tap “Save”.

## 2. Associate iMist3 Module to Customer

- Tap Menu (≡) icon in upper left, then select “Gateways”.
- Tap on “+ Add” button in upper right, then select “Add Gateway” in next screen.
- Enter Customer last name and select from list.
- Scan QR Code or type in 6-digit ID from iMist3 module label and select.
- Green “Gateway Added” screen confirms module has been associated to customer.
- Tap “Gateway Manager” button.

## 3. Check Connection and Test Unit

- Tap menu (≡) icon in upper left, then select “Misting Units”.
- Find the newly connected unit by searching for the customer’s name.
- Check Connection status of unit and run a test mist.


## 4. Send Invitation Email to Customer

- Tap menu (≡) icon in upper left, then select “Customers”.
- Search for customer and open their account information by tapping their name.
- Tap on “Email” to send login invitation.

# iMist3 Setup Guide – Part 2

## Installing iMist3 Module on Gen 1.3 Unit

- Securely place module into space between pump and agitation valve (Shown).
  - Note:** Ensure the antenna is as vertically straight as possible.
- Place controller back onto plastic shroud.

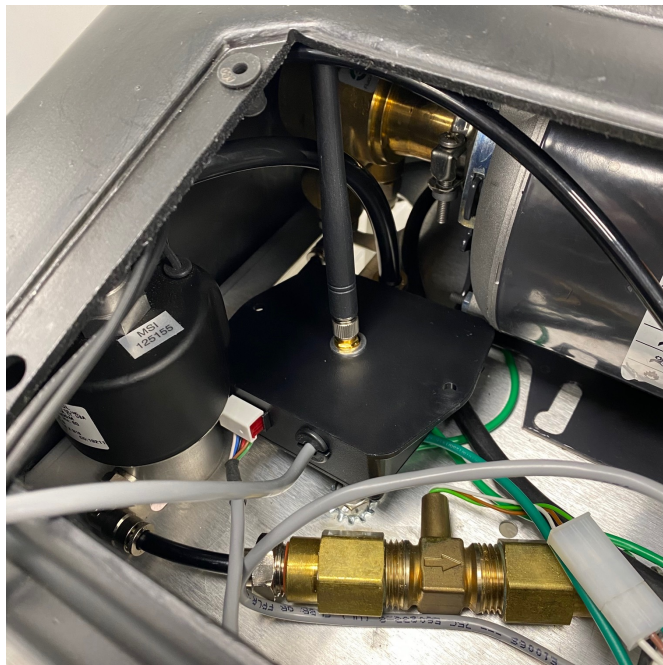

## Installing iMist3 Module on Gen 3+ Unit

- Unplug misting unit from power and disconnect iMist3 module's white connector from controller.
- Remove black plastic cap from center of metal lid to expose mounting hole.
- Fix module to bottom of lid by pushing coax connector through mounting hole, placing lock washer on coax connector, and then tightening lock nut on top side of lid.
- Thread antenna onto coax connector.
- Arrange gray cables behind plastic shroud and reconnect iMist3 cable to controller.
- Place controller back onto plastic shroud and restore power to misting unit.

